



BRASS CABLE GLAND : E1W

BRASS INDOOR AND OUTDOOR GLAND POPULARLY USED WITH SINGLE WIRE ARMoured, PLASTIC OR RUBBER SHEATHED CABLES. TERMINATES & SECURE CABLE ARMOUR ALONG WITH OUTER SHEATH OF THE CABLE THUS ENSURING COMPLETE MECHANICAL STRENGTH AND EARTH CONTINUITY. SUITABLE FOR USED IN WEATHERPROOF AND WATERPROOF CLIMATE. RECOMMENDED TO USE PVC SHROUD FOR ADDITIONAL INGRESS PROTECTION.


TYPE : E1W

GLAND MATERIAL : BRASS

DESIGN SPECIFICATION : BS 6121: PART 1: 1989

ENTRY THREAD : SWA/PVC

FINISH : NATURAL BRASS/NICKEL PLATED

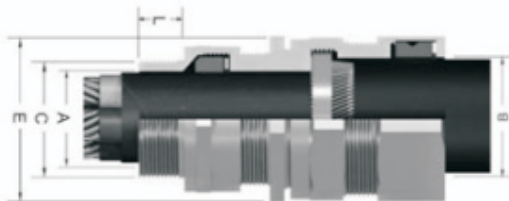

Cat #	Gland Size	Cable Dimensions				Gland Dimensions				
		Under Armour Dia		Overall Dia	Armour Wire Dia	Dia 'A'	Dia 'B'	Metric Entry Thread 'C'	Minimum Thread Length 'D'	Across Flat 'F' Max
		Min	Max	Max						
HGE1W20s	20S	7.8	11.6	15.8	0.9/1.25	11.9	17.0	20	15	24.1
HGE1W20L	20L	11.8	13.9	19.5	0.9/1.25	14.5	20.3	20	15	27.2
HGE1W25s	25S	13.0	15.5	25.3	1.25/1.6	16.5	26.4	25	15	32.8
HGE1W25L	25L	14.0	19.9	26.0	1.25/1.6	20.7	27.4	25	15	35.9
HGE1W32	32	19.7	25.2	33.5	1.6/2.0	26.9	34.2	32	15	49.3
HGE1W40	40	29.1	32.1	39.9	1.6/2.0	32.5	41.8	40	15	50.8
HGE1W50S	50S	32.2	38.1	46.0	2.0/2.5	38.6	50.3	50	15	61.7
HGE1W50L	50L	38.4	43.2	51.0	2.0/2.5	44	52.8	50	15	63.75
HGE1W63S	63S	44.1	50.0	58.9	2.0/2.5	50.3	62.0	63	15	73.9
HGE1W63L	63L	50.1	55.9	65.3	2.5	56.4	66.5	63	15	78.5
HGE1W75S	75S	56.0	61.9	71.6	2.5	62.2	74.3	75	15	87.5
HGE1W75L	75L	62.0	67.9	78.0	2.5	68.3	78.5	75	15	96.0
HGE1W90	90	68.0	74.0	88.0	3.00	80.3	90.2	90	15	105.5

(All Dimensions in mm)