


TINNED COPPER TAPE

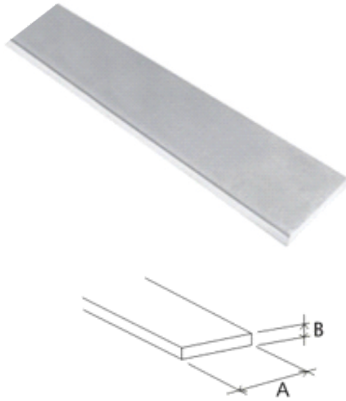

MATERIAL : OXYGEN FREE COPPER

AS PER BS EN:13601 (FORMERLY BS: 1432 C101 / C103)

FINISH : ELECTRO TINNED PLATED

| PRODUCT REF. | CONDUCTOR SIZE (AXB) MM |
|--------------|-------------------------|
| HGTCT253 | 25 X 3 |
| HGTCT256 | 25 X 6 |
| HGTCT503 | 50 X 3 |
| HGTCT506 | 50 X 6 |

BARE COPPER STRANDED CONDUCTORS

MATERIAL : SOFT DRAWN COPPER AS PER BS 6360



| PRODUCT REF. | CONDUCTOR SIZE MM ² | NO. OF STRANDING / WIRE DIA. MM |
|--------------|--------------------------------|---------------------------------|
| HGBCSC6 | 7/1.04 | 6 |
| HGBCSC10 | 7/1.4 | 10 |
| HGBCSC16 | 7/1.7 | 16 |
| HGBCSC25 | 7/2.14 | 25 |
| HGBCSC35 | 7/2.52 | 35 |
| HGBCSC50 | 19/1.78 | 50 |
| HGBCSC70 | 19/2.14 | 70 |
| HGBCSC95 | 19/2.52 | 95 |
| HGBCSC120 | 37/2.03 | 120 |
| HGBCSC150 | 37/2.25 | 150 |
| HGBCSC185 | 37/2.52 | 185 |
| HGBCSC240 | 61/2.52 | 240 |

PVC INSULATED COPPER CONDUCTORS

MATERIAL : SOFT DRAWN COPPER AS PER BS 6360



| PRODUCT REF. | CONDUCTOR SIZE MM ² | NO. OF STRANDING / WIRE DIA. MM |
|--------------|--------------------------------|---------------------------------|
| HGYGC16 | 7/1.7 | 16 |
| HGYGC25 | 7/2.14 | 25 |
| HGYGC35 | 7/2.52 | 35 |
| HGYGC50 | 19/1.78 | 50 |
| HGYGC70 | 19/2.14 | 70 |
| HGYGC95 | 19/2.52 | 95 |
| HGYGC120 | 37/2.03 | 120 |
| HGYGC150 | 37/2.25 | 150 |
| HGYGC185 | 37/2.52 | 185 |
| HGYGC240 | 61/2.25 | 240 |
| HGYGC300 | 61/2.52 | 300 |
| HGYGC400 | 61/2.85 | 400 |