


ALUMINIUM TERMINAL ENDS (STANDARD TYPE)

Confirming to IS 8309

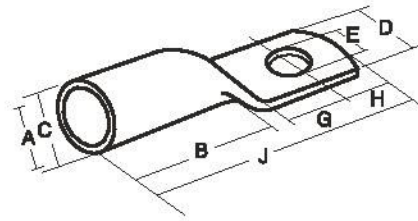

Product Ref.	Conductor Size mm ²	Stud Hole E	Dimensions mm					
			A	C	D	B	G+H	J
Hs AL T 2.5: 3	2.5	3.2	2.0	5.5	7.0	7	8	18
Hs AL T 2.5:3.5.		3.7	2.6					
Hs AL T 4:4	4	4.2	2.9	5.5	7.0	7	8	18
Hs AL T 4:5		5.2			12.0		13	24
Hs AL T 6: 5	6	5.2	3.5	5.5	8	7	13	24
Hs AL T 6: 6		6.2			12.0			
Hs AL T 10: 5	10	5.2	4.4	7.4	10.0	9	17	30
Hs AL T 10:8		8.2			15.0			
Hs AL T 16: 6	16	6.2	5.4	8.3	11	13	20	37
Hs AL T 16: 8		8.5			11			
Hs AL T 16: 10		10.5			18			
Hs AL T 25 : 8	25	8.5	7.0	10.0	14	16	21	44
Hs AL T 25: 10		10.5			20.0			
Hs AL T 25: 12		12.5			20.0			
Hs AL T 35: 8	35	8.5	8.0	10.8	15.0	18	22	47
Hs AL T 35: 10		10.5			18.0			
Hs AL T 50: 8	50	8.5	9.3	13.0	18	22	24	54
Hs AL T 50: 10		10.5			23			
Hs AL T 50 : 12		12.5			23			
Hs AL T 70: 8	70	8.5	11.6	16.0	22.0	26	26	60
Hs AL T 70: 10		10.5						
Hs AL T 70: 12		12.5						
Hs AL T 95: 10	95	10.5	12.9	17.1	25.0	28	28	64
Hs AL T 95: 12		12.5						
Hs AL T 95 : 16		16.5						

Material : Electrolytic Aluminium IS 5082
All Dimensions are in mm

Continued...

Product Ref.	Conductor Size mm ²	Stud Hole E	Dimensions mm					
			A	C	D	B	G+H	J
Hs AL T 120:10	120	10.5	14.8	19.6	28.0	32	30	73
Hs AL T 120: 12		12.5						
Hs AL T 120: 16		16.5						
Hs AL T 150: 10	150	10.5	16.1	21.2	31.0	34	34	79
Hs AL T 150: 12		12.5						
Hs AL T 150: 16		17.0						
Hs AL T 185: 10	185	10.5	18.0	23.7	34	36	36	84
Hs AL T 185: 12		12.5						
Hs AL T 185: 16		17.0						
Hs AL T 240: 12	240	12.5	22.0	28.0	40	44	44	102
Hs AL T 240: 16		17.0						
Hs AL T 300: 16	300	17.0	24.0	31.0	45.5	47		115
Hs AL T 300: 20		21.0						
Hs AL T 400 :20	400	21.0	28.0	36.0	51.0	56	61	130
Hs AL T 500: 20	500	21.0	30.0	41.0	58.0	60	65	140
Hs AL T 630 : 20	630	21.0	35.0	46.0	66.0	69	69	155
Hs AL T 800:00	800	...	39.0	51.0	73.0	77	78	180
Hs AL T 1000: 00	1000	...	43.5	57.0	81.0	100	90	220

Material : Electrolytic Aluminium IS 5082

All Dimensions are in mm